




More information on the website  
radwag.com/en/info,w1,SBS





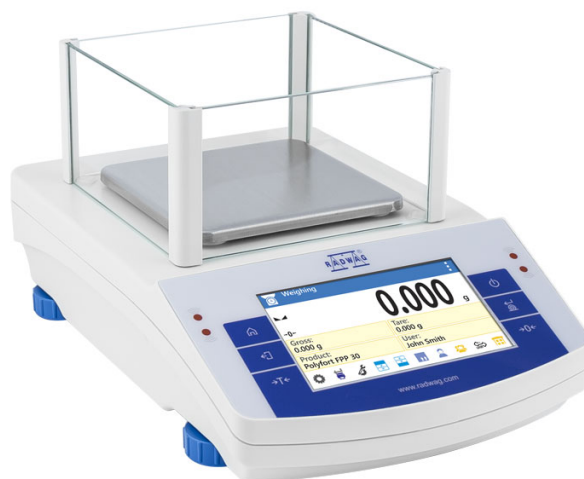
















# PS 3000.X2 Precision Balance

WL-218-0088



The drawings, photos and graphics used are for illustrative purposes only.

## Functions

- |  |   |   |   |
|--|---|---|---|
|  Autotest         |  Dosing                      |  Plus/Minus Control    |  Percent Weighing              |
|  Parts counting   |  Peak hold                   |  Formulation           |  Newton unit measurement       |
|  Statistics       |  Checkweighing               |  IR sensors            |  Under-pan weighing            |
|  GLP Procedures   |  Animal weighing             |  Density determination |  Ambient conditions monitoring |
|  Replaceable unit |  Statistical Quality Control |  ALIBI Memory          |  Mass for titrator             |
|  Wi-Fi            |   |   |   |

## Datasheet

### Metrological parameters

Maximum capacity [Max]	3000 g
Minimum load	-

Metrological parameters	
Readability [d]	1 mg
Verification unit [e]	-
Tare range	-3000 g
Standard repeatability [5% Max]	0.6 mg
Standard repeatability [Max]	1.5 mg
Standard minimum weight (USP)	1.2 g
Standard minimum weight (U=1%, k=2)	0.12 g
Linearity	±6 mg
Stabilization time	3 s
Adjustment	internal (automatic)
OIML Class	-
Sensitivity temperature drift	$2 \times 10^{-6} / ^\circ\text{C} \times \text{Rt}$
Physical parameters	
Leveling system	manual
Display	5" graphic color touchscreen
Delivery components	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.
Weighing pan dimensions	128×128 mm
Packaging dimensions W x D x H	475×380×345 mm
Net weight	4.33 kg
Gross weight	5.5 kg
Construction	
Protection class	IP 43
Components and software	
Database capacity	Products, Users, Packaging, Customers, Formulations, Formulations reports, Ambient Conditions, Weighings, Alibi memory
Features of use	
Touch-free operation	2 IR Sensors
Communication interface	
Communication interface	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi
Electrical parameters	
Power supply	Adapter: 100 – 240V AC 50/60Hz 0.6A; 12V DC 1.2A Balance: 12 – 15V DC 0.8A max
Power consumption	4 W
Environmental conditions	
Operating temperature	+10 – +40 °C
Ambient conditions monitoring (option)	THBR 2.0 System, THBR BOX, THB P, THB W, THB S
Relative humidity	40% – 80%

**Repeatability** is expressed as a standard deviation from 10 weighing cycles.

**Stabilization time** depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

<sup>1</sup> Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



## Accessories (Additional Fee)

Power Adapters	Draft Shield
Cigarette lighter receptacle power supply cables	Receipt Printer
USB cable (scale - printer)	Protective cover for balances
Barcode scanners	Additional modules
Anti-Draft Chamber for Balances with a 128×128 mm Weighing Pan	Under-pan weighing
RS 232, RS 485 cables	RS 232 cables (scale - printer)
THBR 2.0 System - Ambient Conditions Monitoring	RS 232 – RS 485 Converter
Displays	

## Software (Additional Fee)

- |   |                                  |
|---|----------------------------------|
| • RAD Key [WX-010-0005]                   | • Alibi Reader [WX-010-0114]     |
| • R-Lab [WX-010-0080]                     | • Scale Editor 2.1 [WX-010-0173] |
| • RADWAG Development Studio [WX-010-0104] |                                  |

## Device dimensions W x D x H

