



More information on the website
radwag.com/en/info,w1,71Q

WLC 12/F1/K Precision Balance, WLC 6/F1/R Precision Balance, WLC 1/A2 Precision Balance, WLC 30/F1/R Precision Balance, WLC 60/C2/R Precision Balance, WLC 6/A2 Precision Balance, WLC 60/C2/K Precision Balance, WLC 120/C2/K Precision Balance, WLC 12/F1/R Precision Balance, WLC 120/C2/R Precision Balance, WLC 6/F1/K Precision Balance, WLC 10/A2 Precision Balance, WLC 2/A2 Precision Balance, WLC 20/A2 Precision Balance, WLC 30/F1/K Precision Balance



WLC 12/F1/K Precision Balance
WLC 6/F1/K Precision Balance
WLC 30/F1/K Precision Balance



WLC 6/F1/R Precision Balance
WLC 30/F1/R Precision Balance
WLC 12/F1/R Precision Balance



WLC 1/A2 Precision Balance
WLC 2/A2 Precision Balance



WLC 60/C2/R Precision Balance
WLC 120/C2/R Precision Balance



WLC 6/A2 Precision Balance
WLC 10/A2 Precision Balance
WLC 20/A2 Precision Balance



WLC 60/C2/K Precision Balance
WLC 120/C2/K Precision Balance

Functions



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Internal battery



Peak hold



Newton unit
measurement

Datasheet

	WLC 1/A2 Precision Balance	WLC 2/A2 Precision Balance	WLC 6/F1/R Precision Balance
Metrological parameters			
Maximum capacity [Max]	1 kg	2 kg	6 kg
Minimum load	—	—	5 g
Readability [d]	0,01 g	0,01 g	0,1 g
Verification scale interval [e]	-	-	1 g
Tare range	-1 kg	-2 kg	-6 kg
Repeatability	0,01 g	0,01 g	0,1 g
Linearity	±0,03 g	±0,03 g	±0,2 g
Stabilization time	3 s	3 s	3 s
Adjustment	external	external	
OIML Class	—	—	II
Physical parameters			
Leveling system	manual	manual	manual
Display	LCD (backlit)	LCD (backlit)	LCD (backlit)
Weighing pan dimensions	195×195 mm	195×195 mm	300×300 mm
Packaging dimensions	470×380×336 mm	470×380×336 mm	570×390×170 mm
Net weight	2,8 kg	2,8 kg	5,2 kg
Gross weight	4,3 kg	4,3 kg	6 kg
Communication interface			
Communication interface	2×RS232, USB-A, USB-B	2×RS232, USB-A, USB-B	RS232
Electrical parameters			
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operation time on batteries	15 h (average time)	15 h (average time)	10 h (average time)
Environmental conditions			
Operating temperature	+15 ÷ +30 °C	+15 ÷ +30 °C	+15 ÷ +30 °C
Relative humidity	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

Datasheet

	WLC 6/A2 Precision Balance	WLC 6/F1/K Precision Balance	WLC 10/A2 Precision Balance
Metrological parameters			
Maximum capacity [Max]	6 kg	6 kg	10 kg
Minimum load	5 g	5 g	—
Readability [d]	0,1 g	0,1 g	0,1 g
Verification scale interval [e]	1 g	1 g	—
Tare range	-6 kg	-6 kg	-10 kg
Repeatability	0,1 g	0,1 g	0,1 g
Linearity	±0,2 g	±0,2 g	±0,3 g
Stabilization time	3 s	3 s	3 s
Adjustment			external
OIML Class	II	II	—
Physical parameters			
Leveling system	manual	manual	manual
Display	LCD (backlit)	LCD (backlit)	LCD (backlit)
Weighing pan dimensions	195×195 mm	300×300 mm	195×195 mm
Packaging dimensions	470×380×336 mm	570×390×170 mm	470×380×336 mm
Net weight	2,8 kg	5,2 kg	2,8 kg
Gross weight	4,3 kg	6 kg	4,3 kg
Communication interface			
Communication interface	2×RS232, USB-A, USB-B	RS232	2×RS232, USB-A, USB-B
Electrical parameters			
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operation time on batteries	15 h (average time)	10 h (average time)	15 h (average time)
Environmental conditions			
Operating temperature	+15 ÷ +30 °C	+15 ÷ +30 °C	+15 ÷ +30 °C
Relative humidity	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

Datasheet

	WLC 12/F1/K Precision Balance	WLC 12/F1/R Precision Balance	WLC 20/A2 Precision Balance
Metrological parameters			
Maximum capacity [Max]	12 kg	12 kg	20 kg
Minimum load	—	—	—
Readability [d]	0,2 g	0,2 g	0,1 g
Verification scale interval [e]	-	-	-
Tare range	-12 kg	-12 kg	-20 kg
Repeatability	0,2 g	0,2 g	0,1 g
Linearity	±0,6 g	±0,6 g	±0,3 g
Stabilization time	3 s	3 s	3 s
Adjustment	external	external	external
OIML Class	—	—	—
Physical parameters			
Leveling system	manual	manual	manual
Display	LCD (backlit)	LCD (backlit)	LCD (backlit)
Weighing pan dimensions	300×300 mm	300×300 mm	195×195 mm
Packaging dimensions	570×390×170 mm	570×390×170 mm	470×380×336 mm
Net weight	5,2 kg	5,2 kg	2,8 kg
Gross weight	6 kg	6 kg	4,3 kg
Communication interface			
Communication interface	RS232	RS232	2×RS232, USB-A, USB-B
Electrical parameters			
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operation time on batteries	10 h (average time)	10 h (average time)	15 h (average time)
Environmental conditions			
Operating temperature	+15 ÷ +30 °C	+15 ÷ +30 °C	+15 ÷ +30 °C
Relative humidity	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

Datasheet

	WLC 30/F1/K Precision Balance	WLC 30/F1/R Precision Balance	WLC 60/C2/K Precision Balance
Metrological parameters			
Maximum capacity [Max]	30 kg	30 kg	60 kg
Minimum load	—	—	50 g
Readability [d]	0,5 g	0,5 g	1 g
Verification scale interval [e]	-	-	10 g
Tare range	-30 kg	-30 kg	-60 kg
Repeatability	0,5 g	0,5 g	1 g
Linearity	±1,5 g	±1,5 g	±3 g
Stabilization time	3 s	3 s	3 s
Adjustment	external	external	
OIML Class	—	—	II
Physical parameters			
Leveling system	manual	manual	manual
Display	LCD (backlit)	LCD (backlit)	LCD (backlit)
Weighing pan dimensions	300×300 mm	300×300 mm	400×500 mm
Packaging dimensions	570×390×170 mm	570×390×170 mm	720×620×210 mm
Net weight	5,2 kg	5,2 kg	12,5 kg
Gross weight	6 kg	6 kg	15 kg
Communication interface			
Communication interface	RS232	RS232	RS232
Electrical parameters			
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operation time on batteries	10 h (average time)	10 h (average time)	10 h (average time)
Environmental conditions			
Operating temperature	+15 ÷ +30 °C	+15 ÷ +30 °C	+15 ÷ +30 °C
Relative humidity	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

Datasheet

	WLC 60/C2/R Precision Balance	WLC 120/C2/K Precision Balance	WLC 120/C2/R Precision Balance
Metrological parameters			
Maximum capacity [Max]	60 kg	120 kg	120 kg
Minimum load	50 g	—	—
Readability [d]	1 g	2 g	2 g
Verification scale interval [e]	—	-	-
Tare range	-60 kg	-120 kg	-120 kg
Repeatability	1 g	2 g	2 g
Linearity	±3 g	±6 g	±6 g
Stabilization time	3 s	3 s	3 s
Adjustment		external	external
OIML Class	II	—	—
Physical parameters			
Leveling system	manual	manual	manual
Display	LCD (backlit)	LCD (backlit)	LCD (backlit)
Weighing pan dimensions	400×500 mm	400×500 mm	400×500 mm
Packaging dimensions	720×620×210 mm	720×620×210 mm	720×620×210 mm
Net weight	12,5 kg	12,5 kg	12,5 kg
Gross weight	15 kg	15 kg	15 kg
Communication interface			
Communication interface	RS232	RS232	RS232
Electrical parameters			
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operation time on batteries	10 h (average time)	10 h (average time)	10 h (average time)
Environmental conditions			
Operating temperature	+15 ÷ +30 °C	+15 ÷ +30 °C	+15 ÷ +30 °C
Relative humidity	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation	10% ÷ 85% RH no condensation

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.



Accessories

Balance Storage Case
Antivibration Tables
RS 232 cables (scale - printer)
Stands, wall mounting kits and mounting brackets
Cigarette lighter receptacle power supply cables
Receipt Printer
Displays
Density determination KIT

RS 232 – Ethernet Converter
AP2-1 Current Loop Unit
RS 232, RS 485 cables
RS 232 – USB Converter
Protective cover for balances
Under-Pan Weighing Rack
RS 232 – RS 485 Converter


Software

RAD-KEY
R-LAB



LabVIEW Driver
Scales Editor 2.1

Device dimensions


WLC 12/F1/K Precision Balance, WLC 6/F1/R Precision Balance, WLC 1/A2 Precision Balance, WLC 30/F1/R Precision Balance, WLC 60/C2/R Precision Balance, WLC 6/A2 Precision Balance, WLC 60/C2/K Precision Balance, WLC 120/C2/K Precision Balance, WLC 12/F1/R Precision Balance, WLC 120/C2/R Precision Balance, WLC 6/F1/K Precision Balance, WLC 10/A2 Precision Balance, WLC 2/A2 Precision Balance, WLC 20/A2 Precision Balance, WLC 30/F1/K Precision Balance

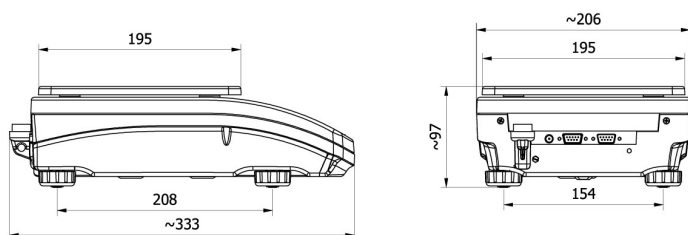



WLC A2

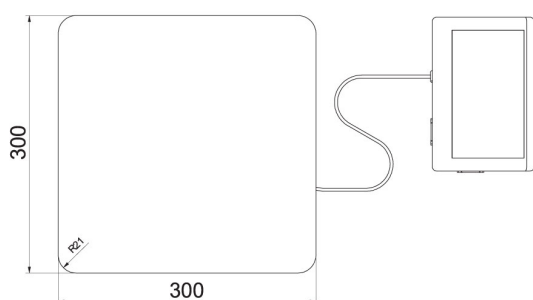



WLC F1/K

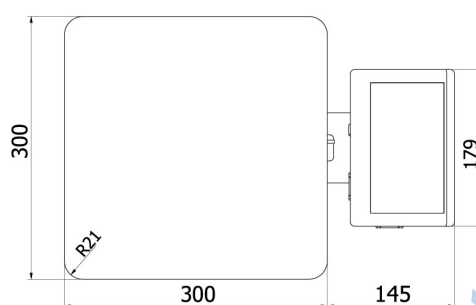

WLC F1/R

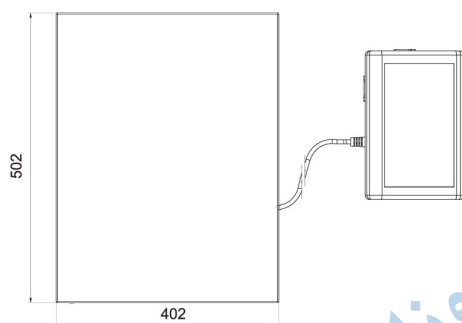

WLC C2/K

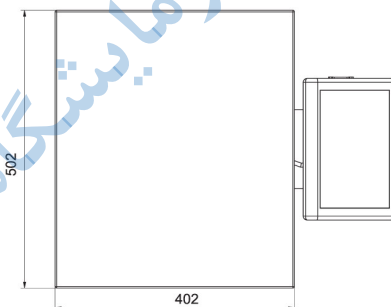

WLC C2/R

فروشگاه تجهیزات آزمایشگاهی روناکو